


# MVSN-220 系列


NAMUR 電磁閥

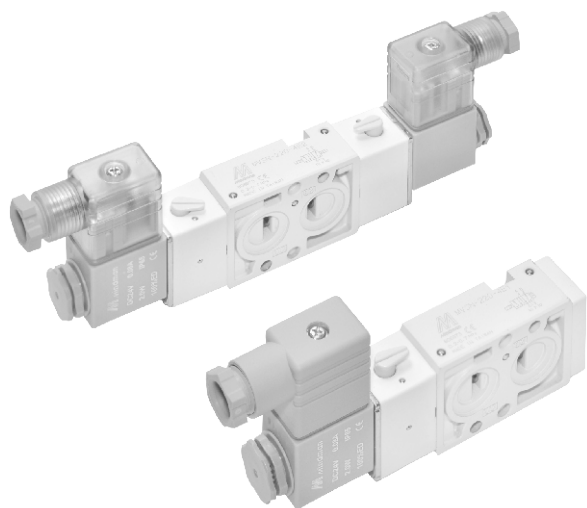

## 規格：

型號	4E1	4E2
配管口徑代號	6A, 8A	
配管口徑尺寸	G1/8, G1/4	
方口數	5口	
位置數	2位置	
使用流體	空氣	
使用壓力範圍	0.2~0.8 MPa	
耐壓力	1 MPa	
有效斷面積	18 mm <sup>2</sup>	
周圍溫度	-5~+50℃ (不凍結)	
應答時間	38 ms	
定格電壓	AC110V, AC220V (50/60)Hz, DC24V	
電力消耗	AC=6/4.9VA, DC=2.5W	
電壓容許範圍	±10%	
絕緣等級	F 級	
重量 (防爆型)	233 g (441 g)	343 g (761 g)

## 訂購代號：

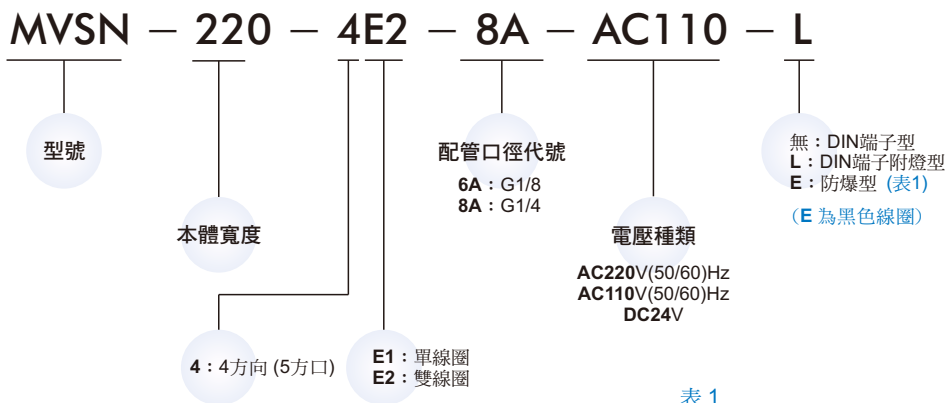

## 流量特性圖：

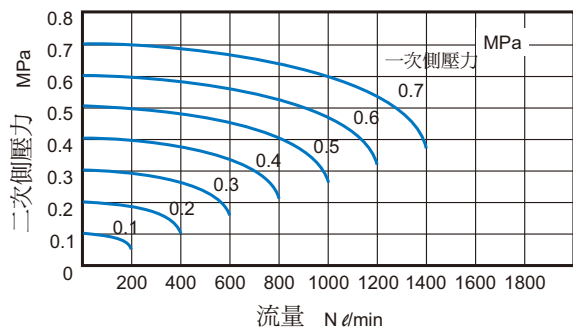


表 1  
防爆型規格：






防爆等級	EEx m II T4
定格電壓	AC110V, AC220V (50/60)Hz, DC24V
電力消耗	AC=4.4VA, DC=5W
電壓容許範圍	±10%
絕緣等級	F 級

# MVSN-220 外觀尺寸

NAMUR 電磁閥



## MVSN-220-4E1

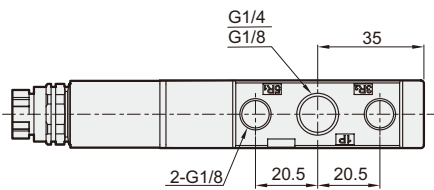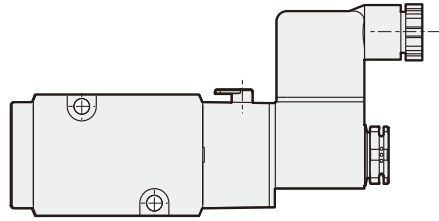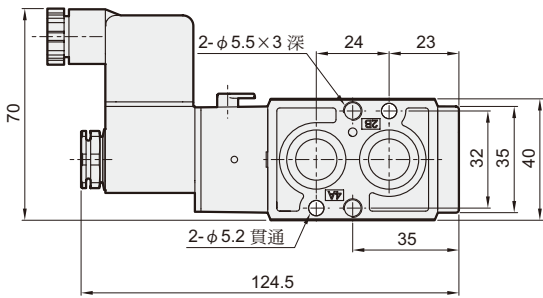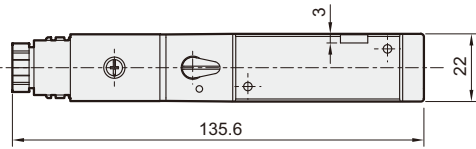

## MVSN-220-4E2

