

# MAF300LD / M series


**AIR UNIT (MIST / MICROMIST FILTER)**




**mindman**



## Symbol



D : 0.3  $\mu\text{m}$




M : 0.01  $\mu\text{m}$

- MA300LD is designed for removal of foreign matter as well as oil mist (Element : 0.3  $\mu\text{m}$ )
- MA300LM is designed for removal of foreign matter as well as oil mist (Element : 0.01  $\mu\text{m}$ )

## Specification

Model	MAF300LD/M	
Bore No.	8A	10A
Port size	1/4	3/8
Medium	Air	
Operating pressure range (※)	0.05~1 MPa	
Proof pressure	1.5 MPa	
Ambient temperature	-5°C~+60°C (No freezing)	
Filter element	0.3 $\mu\text{m}$ , 0.01 $\mu\text{m}$	
Weight	300g	

## Order example

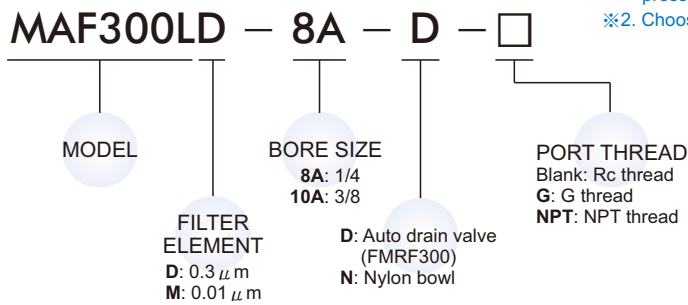

- ※1. Standard unit contains semi-auto-drain function when operating pressure below 0.05 MPa.  
 ※2. Choose auto-drain FMRF300, the pressure range is 0.15 ~ 1 MPa.

